

Expansion Unit

RX418



Synology RX418 delivers an effortless solution for volume expansion and data backup for Synology 1U RackStation¹ by adding 4 additional SATA drive bays on-the-fly. With its short-depth chassis design, RX418 ensures easy installation and deployment in 2-post racks and wall mount racks. Synology RX418 is backed with Synology's 3-year² limited warranty.

Storage Capacity Expansion

When the storage capacity on Synology 1U RackStation reaches its limit, Synology expansion unit RX418 provides easy capacity expansion by adding 4 3.5"/2.5" SATA drives to the system. Synology RX418 can also be used as a dedicated local backup destination of Synology 1U RackStation for comprehensive data protection.

Reliable Plug-and-play Design

Simply connect Synology RX418 to corresponding Synology RackStation and it is ready to use. Drives in the connected Synology RX418 operate as though they were internal to the connected Synology NAS and can be managed directly by Synology DiskStation Manager (DSM), with no additional software installation required.

Green and Easy to Manage


Award-winning Synology DSM provides an intuitive user interface for easy system management. Drive hibernation can be configured in DSM to take effect automatically when the system has been inactive for a period of time. This not only saves energy but also extends the lifespan of the installed drives.

Highlights

- Plug-and-play design for seamless storage space upgrade
- Online volume expansion
- 12-inch depth to fit in 2-post racks and wall mount racks
- Energy-saving deep sleep mode
- Managed from Synology DiskStation Manager (DSM)

Hardware Overview

Front

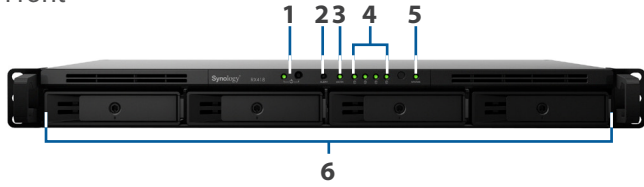

Rear



1	Power button and indicator	2	Alert indicator	3	eSATA indicator	4	Drive status indicator
5	Status indicator	6	Drive tray	7	Fan	8	Power port
9	eSATA port						

Technical Specifications

Hardware

Compatible drive type	4 x 3.5/2.5" SATA HDD/SSD (drives not included)
External port	1 x eSATA
Size (HxWxD)	<ul style="list-style-type: none">44 x 430.5 x 290 mm44 x 482 x 325 mm (with server ears)
Weight	4.28 kg
System fan	3 (40 x 40 x 20 mm)
AC input power voltage	100V to 240V AC
Power frequency	50 to 60Hz, single phase
Power recovery	Synchronized with connected Synology RackStation
Operating temperature	5°C to 35°C (40°F - 95°F)
Storage temperature	-20°C to 60°C (-5°F to 140°F)
Relative humidity	5% to 95% RH
Maximum operating altitude	5,000 m (16,400 ft)
Supported NAS models ¹	RS818+, RS818RP+, RS816, RS815+, RS815RP+, RS815

Environment and Packaging

Environment safety	RoHS compliant
Package content	<ul style="list-style-type: none">RX418 main unitQuick Installation GuideAccessory packExpansion cableAC power cord
Optional accessories	Rail Kit RKM114-Rail Kit Mounted / RKS1317-Rail Kit Sliding
Warranty ²	3 years ³

*Model specifications are subject to change without notice. Please refer to www.synology.com for the latest information.

1. For complete information on compatible models, please visit www.synology.com.
2. 5-year warranty is available as an optional bundle with EW201, 2-year Extended Warranty service add-on. Visit https://www.synology.com/en-global/products/Extended_Warranty for more information on availability.
3. The warranty period starts from the purchase date as stated on your purchase receipt. Visit <http://www.synology.com> for more information.

SYNOLOGY INC.

Synology is dedicated to taking full advantage of the latest technologies to bring businesses and home users reliable and affordable ways to centralize data storage, simplify data backup, share and sync files across different platforms, and access data on-the-go. Synology aims to deliver products with forward-thinking features and the best in class customer services.

Copyright © 2019, Synology Inc. All rights reserved. Synology, the Synology logo are trademarks or registered trademarks of Synology Inc. Other product and company names mentioned herein may be trademarks of their respective companies. Synology may make changes to specification and product descriptions at anytime, without notice.

RX418-2019-ENU-REV003

Headquarters

Synology Inc. 9F., No.1, Yuandong Rd., Banqiao Dist., New Taipei City 220, Taiwan Tel: +886 2 2955 1814 Fax: +886 2 2955 1884

China

Synology Shanghai
200070, Room 201, No. 511 Tianmu W.
Rd., Jingan Dist. Shanghai, China

France

Synology France SARL
102 Terrasse Boieldieu (TOUR W)
92800 Puteaux, France
Tel: +33 147 176288

North & South America

Synology America Corp.
3535 Factoria Blvd SE #200 Bellevue,
WA98006, USA
Tel: +1 425 818 1587

United Kingdom

Synology UK Ltd.
Unit 5 Danbury Court, Linford Wood,
Milton Keynes, MK14 6PL, United Kingdom

Germany

Synology GmbH
Grafenberger Allee 125 40237 Düsseldorf
Deutschland
Tel: +49 211 9666 9666

Japan

Synology Japan Co., Ltd
4F, 3-1-2, Higashikanda, Chiyoda-ku,
Tokyo, 101-0031, Japan